

CHR[®] PI-K SERIES

Polyimide (Kapton[®]) Pressure Sensitive Adhesive Tape

CHR 2345-1D and 2345-2D are manufactured from DuPont tradename Kapton film (25 micron and 50 micron respectively) coated with high quality Silicone pressure sensitive adhesive.

Features/Benefits

Designed for high temperature electrical applications where a thin, conformable backing combined with excellent dielectric properties are required. Good chemical and solvent resistance. Nuclear radiation resistant. **CHR** 2345-1D and 2345-2D are flame retardant and Class H- 180°C per Underwriters Laboratories, Inc. Guide File OANZ2.E66639. **CHR** 2345-1D and 2345-2D are recognized by UL Electrical Insulating Systems.


Availability

CHR 2345-1D and 2345-2D are available as master rolls 660 mm × 33 m (26 in × 36 yd).

Rolls can be slit down to widths of 6.35 mm (0.25 in).

Applications

CHR 2345-1D and 2345-2D are designed for insulation of bobbins, transformers, motors, capacitors, printed circuit board assembly masking and wire harnesses.

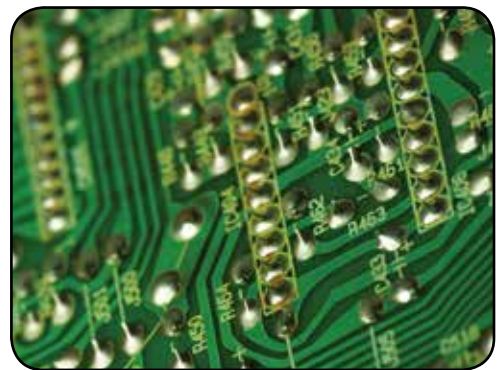

CHR 2345-1D and 2345-2D Properties

Performance tests are run using standard test procedures.

The values presented are typical values and should not be used for specification purposes.

Product Number	2345-1D	2345-2D
Backing Material	Kapton Film	Kapton Film
Adhesive Type	Silicone	Silicone
Backing Thickness mil (μm)	1.0 (25)	2.0 (50)
Adhesive Thickness mil (μm)	1.4 (35)	1.4 (35)
Overall Thickness mil (μm)	2.4 (60)	3.3 (85)
Adhesion Strength* oz/in (N/cm)	21 (2.3)	23 (2.5)
Tensile Strength lbs/in (N/cm)	26 (45)	43 (75)
Elongation (% at break)	35	35
Dielectric kv	6.5	10
UL File	E66639	E66639
Insulation Class °C	180	180
Short Time °C	260	260
Log Width inches (mm)	26 (660)	26 (660)
Color	Brown	Brown

*Peel adhesion at 180 degrees on steel.

Shelf Life

18 months from date of sale when stored in original packaging at 21°C (70°F) and 50% relative humidity.

**Saint-Gobain Tape Solutions**

North America | South America | Europe | Asia

For a full list of locations, please visit
[tapesolutions.saint-gobain.com/contact-us](https://www.tapesolutions.saint-gobain.com/contact-us)

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: For a period of 6 months, Saint-Gobain warrants this product(s) to be free from defects in manufacturing. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Form #1540 | © Saint-Gobain July 2020 | **CHR** and **CHRTape** are trademarks of Saint-Gobain. | **Kapton** is registered and owned by Dupont