




5067-53

Premium Grade Greenhouse Patch Tape

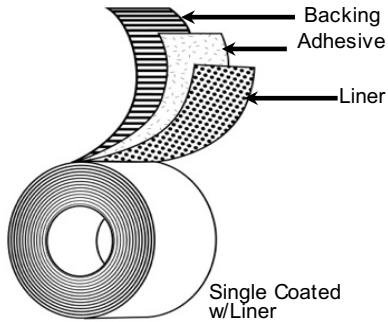

- Backing:** UV Stabilized LDPE Film
- Adhesive:** Acrylic (A128)
- Liner:** 53# Coated Kraft
- Colors:** Clear
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 54" x 48ft

Applications

- Patching and seaming of greenhouse films
- General purpose sealing, splicing, and patching
- Indoor/outdoor surface protection
- Temporary hold down

Features

Benefits

- | | |
|--|---|
| <ul style="list-style-type: none"> • LDPE Film | <ul style="list-style-type: none"> • UV and weather resistant • Withstands extended exposure to the elements • Conformable • Clear film for invisible repairs |
| <ul style="list-style-type: none"> • Acrylic Adhesive | <ul style="list-style-type: none"> • Aggressive bond to greenhouse films • Excellent all temperature performance • Excellent long-term stability |
| <ul style="list-style-type: none"> • 53# Coated Kraft Liner | <ul style="list-style-type: none"> • Easy to use at wide widths |

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	6.0	mils	0.152	mm	PSTC-133
Substrate Thickness	5.0	mils	0.127	mm	PSTC-133
Adhesion to Steel	40	oz/in	4.38	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.26	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 10/8/17